



landscape • entertainment • architectural • hospitality • illumination

underwater



SL-11-BAR



NEW



SL-11-AB-BRS



SL-11-BAT



SPECIFICATIONS:

- Housing:** Cast brass
- Aiming Bracket:** Cast brass w/ black composite thumb knobs
- Lens:** High impact clear acrylic
- Lamp Supplied:** 25-watt PAR36 VWFL (GE-14556)
- Lamp Options:** See Back Panel (50w. max)
- Lamp Base:** Screw terminal #10 stud
- Lamp Life:** 2000 hours average rating
- Wiring:** 15 feet 18/2 SJTOW cord
- Connector:** Brass, nickel plated liquid tight straight bushing from side of fixture
- Mounting:** Flush on bottom surface on both standard and -AB units. For securing to wall or floor use appropriate stainless steel screws and holes (provided)
- Finish Options:** For black acid treatment add (-BAT) to catalog number
NEW For brass acid rust add (-BAR) to catalog number
- ACCESSORIES:**
- Color Acrylic Lens:** Blue, Red, Green, Amber, White (FA-35-AL- specify color)
- Aiming Bracket:** FA-105
- Additional Cord:** Sold per foot in 5 ft lengths, (not to exceed 50 feet)
Add total number of feet to catalog number



**SL-11 DESIGNED FOR USE UNDERWATER ONLY.
FAILURE TO KEEP SUBMERGED OR
OPERATING ABOVE WATER WILL VOID WARRANTY**

ORDERING INFORMATION:

- SL-11** 25 watt PAR-36 VWFL cast brass underwater light with 15' cord
- SL-11-AB** 25 watt PAR-36 VWFL cast brass underwater light with 15' cord and aiming bracket



SPECIFICATIONS:

- Housing:** Cast brass
- Aiming Bracket:** Cast brass w/ black composite thumb knobs
- Lens:** High impact clear tempered flat glass
(High impact clear tempered convex glass available)
- Lamp Supplied:** 20w MR-16 ULTRA FL (BAB) 10,000 hours average rating
THE 10K ULTRA IS NOW STANDARD
- Lamp Options:** See Back Panel (50w. max)
- Lamp Base:** GUS.3 Bi Pin ceramic with 250c lead wires
- Lamp Life:** MR-16 ULTRA 10,000 hours average rating
MR-16 TITAN 18,000 hours average rating
ARROW MR-16 LED 50,000 hours average rating
- Wiring:** 15 feet 18/2 SJTOW cord
- Connector:** Brass, nickel plated liquid tight straight bushing from bottom of fixture. Side mount wire (-SM) available
- Mounting:** Flush on bottom surface on both standard and -AB units. For securing to wall or floor use appropriate stainless steel screws and holes (provided)
- Finish Options:** For black acid treatment add (-BAT) to catalog number
For brass acid rust add (-BAR) to catalog number
- ACCESSORIES:**
- Color Acrylic Lens:** Blue, Red, Green, Amber, White (FA-11-SL33, specify color)
- Angle Collar:** FA-155-Cast-BRS
- Aiming Bracket:** FA-154 (includes black thumb screws)
- Additional Cord:** Sold per foot in 5 ft lengths, (not to exceed 50 feet)
Add total number of feet to catalog number



SL-33-AB-LED



SL-33-AB-AC-ULT

SL-33-AB-LED-EDESX-BAR

SL-33-AC-ULT-BAT

SL-33-AC-SM-ULT

SL-33-ULT

SL-33-SM-ULT

ORDERING INFORMATION:

- SL-33-ULT 20w MR16 ULTRA FL (BAB) 10,000 hour Cast Brass Underwater Light w/15' cord
- SL-33-SM-ULT SL-33-ULT w/ side mount
- SL-33-AB-ULT SL-33-ULT w/ aiming bracket
- SL-33-AC-ULT SL-33-ULT w/ angle collar
- SL-33-AB-AC-ULT SL-33-ULT w/ aiming bracket & angle collar
- SL-33-AC-SM-ULT SL-33-ULT w/ angle collar & side mount





SL-40-AB-AC-ULT

SPECIFICATIONS:

- Housing:** Cast brass
- Aiming Bracket:** Cast brass w/ black composite thumb knobs
- Lens:** High impact clear tempered flat glass
- Lamp Supplied:** 20w MR-11 ULTRA FL (FTD) 10,000 hours average rating
THE 10K ULTRA IS NOW STANDARD
- Lamp Options:** See Back Panel (35w max)
- Lamp Base:** GU5.3 Bi Pin ceramic with 250c lead wires
- Lamp Life:** 10,000 hours average rating
- Wiring:** 15 feet 18/2 SJTOW cord
- Connector:** Brass, nickel plated liquid tight straight bushing from back of fixture
- Mounting:** Flush on bottom surface on both standard and -AB units. For securing to wall or floor use appropriate stainless steel screws and holes (provided)
- Finish Options:** For black acid treatment add (-BAT) to catalog number
For brass acid rust add (-BAR) to catalog number

ACCESSORIES:



Color Acrylic Lens:

Blue, Red, Green, Amber, White (FA-11-40, specify color)

Angle Collar:


FA-157 (Cast brass)

Aiming Bracket:

FA-158 (includes black thumb screws)

Additional Cord:

Sold per foot in 5 ft lengths, (not to exceed 50 feet)
Add total number of feet to catalog number



SL-40-AB-ULT-BAT



SL-40-AC-ULT-BAR



SL-40-AC-SM-ULT




SL-40-ULT-BAR



SL-40-SM-ULT

ORDERING INFORMATION:

- SL-40-ULT 20w MR11 ULTRA FL (FTD) 10,000 hour Cast Brass Underwater Light w/15' cord
- SL-40-SM-ULT SL-40-ULT w/ side mount
- SL-40-AB-ULT SL-40-ULT w/ aiming bracket
- SL-40-AC-ULT SL-40-ULT w/ angle collar
- SL-40-AB-AC-ULT SL-40-ULT w/ aiming bracket & angle collar
- SL-40-AC-SM-ULT SL-40-ULT w/ angle collar & side mount

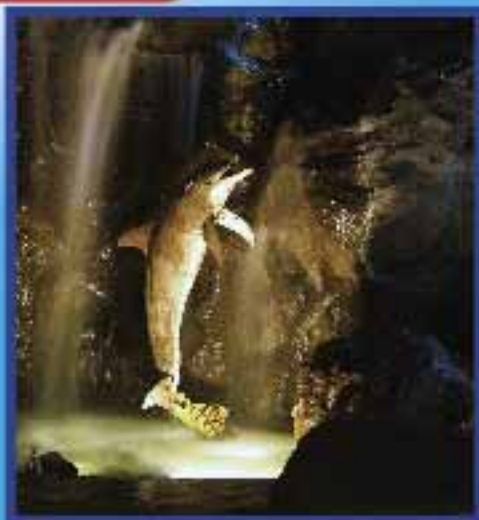

THE OCTOPUS



NEW



FA-H20-JB-9H-BAR




THE OCTOPUS
Underwater Lighting

SPECIFICATIONS

- Construction: Cast brass, 20 cubic inches volume
- Gasket: Black 50 durometer silicone
- Screws: (6) 10-24 x 5/8" phillip flat marine grade (18-8) stainless steel
- Conduit Entries to fixture ports: Bottom and side entries available. Specify size and location
- Fittings: Brass nickel plated PG9 Liquid Tight
- Fixture Fittings: For Focus fixtures 12v. source brass nickel plated PGI 1 Liquid Tight for 12/2 cable
- Internal Connector: Quick connection lug for eight 18/2 wires plus feed wire to 12v. source. Seal thermal plastic housing with two stainless steel barrel lugs plus 3" of 3M dielectric sealing tape to pack connections for waterproofing

The OCTOPUS™ underwater J-Box is designed for connection of up to eight 12v 18/2 wires for underwater fixtures. Current tap sizes available are PG9, PG11, 1/2" NPS & 3/4" NPS. For 1/2" or 3/4" service conduit contact FOCUS. For additional PG9 hole with plug, Specify at time of order.
NOTE: Brass liquid tight fittings recommended. Fitting size must match cable size to ensure water proof connection.

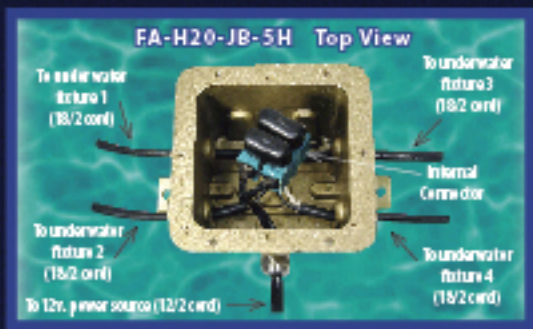

CATALOG NO.	DESCRIPTION	EST. WT.
FA-H20-JB	Underwater J-Box	4.00 Lbs.
FA-H20-JB-25	Underwater J-Box (w/25ft 12/2c cable)	5.50 Lbs
FA-H20-JB-50	Underwater J-Box (w/50ft 12/2c cable)	7.00Lbs
FA-H20-JB-75	Underwater J-Box (w/75ft 12/2c cable)	8.50 Lbs
FA-H20-JB-100	Underwater J-Box (w/100ft 12/2c cable)	10.00 Lbs

Supplied standard with 4 holes of fittings. To receive a tapped hole and liquid tight fitting specify at time of order. Specify number of fixture ports PLUS 1 feed for 12/2 lead wire eg: 4H = 3 Fixture ports plus 1 Lead Wire port. Designed for up to eight fixtures add (-1H to -9H) to above catalog number. Fits all FOCUS underwater fixtures. If you are using an other manufacturer's fixture you must specify the desired size and location of holes at time of order. Focus does not carry all types & sizes of liquid tight fittings. Warranty Disclaimer: Alterations of product are not recommended by FOCUS and voids warranty.

Also available in Black Acid Treatment (shown) add-BAT, or Brass Acid Rust add-BAR.

