

Alfa

ASIAN FUSION PENDANTS

ESSENCE

P159

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

Each P159 glass is individually crafted with hand-pulled edges, then fitted with a Vintage Bronze cordset. 12V 50W max. JC Lamp included.

Pendant Kit includes: Quick Jack Cord Set - 78" Coaxial Cable
 • Cordset can be shortened in the field • Glass Shade & Lamp Cover • 12V 50W JC Lamp



ORDERING INFORMATION

Model	Mounting Adapter	Hardware Finish	Example
P159	QJ QJ Pendant with Quick Jack Adapter* MP Pendant on Single Dome MonoPoint MC Pendant on Single Cone MonoPoint MB3 3X Pendants on Arched Bar MP3 3X Pendants on Large Dome	BRZ BRZ Vintage Bronze	P159QJ-BRZ-ESS

*For use on Alfa Quick Jack Systems

PRODUCT SPECIFICATIONS

Electrical

Lamp: 12V 50W max. JC Lamp included, GY6.35

Socket: Ceramic Bi-Pin Socket, accepts G4 and GY6.35 Lamps

Agency Approval

Labels: ETL classified to UL 1598 for use in U.S. • ETL classified to CSA C22.2 No. 250 for use in Canada.

Mounting Specifications

QJ: Supplied with Quick Jack Adapter for use on MonoTrack.


MP: Supplied on a Non-Quick Jack (905 type) Slim Line MonoPoint. Internal 60W Electronic Transformer. Dimmable*.

MC: Supplied on a Non-Quick Jack (908 type) Cone MonoPoint. Internal 60W Magnetic Transformer. Dimmable*.

MB3: 3X Pendants supplied on a Non-Quick Jack (99003 type) Triple Arched Bar MonoPoint. Internal 150W Electronic Transformer. Dimmable*.

MP3: 3X Pendants supplied on a Non-Quick Jack (99014 type) Triple Large Dome MonoPoint. Internal 200W Magnetic Transformer. Dimmable*.

DIMENSIONS

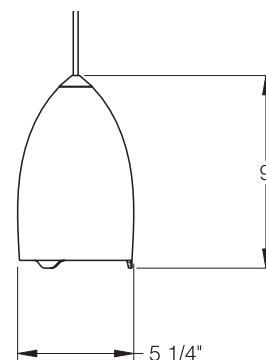

*Alfa recommends the use of Solid State (Electronic) Dimmers with Alfa products with Electronic Transformers. Magnetic Transformers may be dimmed with a quality Incandescent Dimmer.