

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in hospitality, restaurant, and residential applications as well as closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

### CONSTRUCTION

The square brushed nickel housing, trim, and finials support five frosted glass diffusers on each side. The horizontal glass diffuser has clear edges.

### OPTICS

Produces 1090 lumens at 50,000 hours of life.

### ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 16 watts, 67 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included for mounting to a standard junction box. Can be wall or ceiling mounted.

### LISTINGS

UL Listed to US and Canadian safety standards. ENERGY STAR® certified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

# Rao



## LED Flush Mount



### Specifications

Depth:	3-4/16 (8.3)
Width:	9-8/16 (24.1)
Length:	9-8/16 (24.1)
Weight:	4.1 lbs

All dimensions are inches (centimeters) unless otherwise indicated.



### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example: FMRAOL 10 14840 BN**

Series	Module/CRI	Color temperature	Finish
<b>FMRAOL 10</b> 10" Square glass LED flush mount	<b>148</b> >80	<b>40</b> 4000K 35 3500K <sup>1</sup> <b>30</b> 3000K 27 2700K <sup>1</sup>	<b>BN</b> Brushed nickel



**Accessories:** Order as separate catalog number.

DFMRAOL 10 10" Replacement Rao diffuser pack (all five glass panels)

### Notes

<sup>1</sup> Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

LIGHTING FACTS

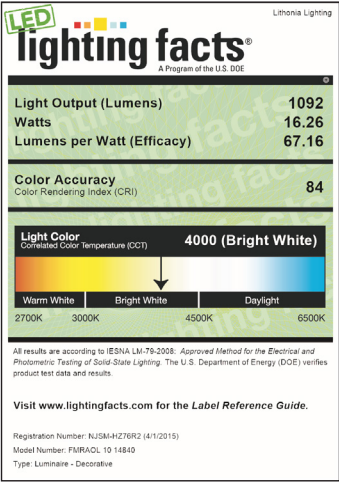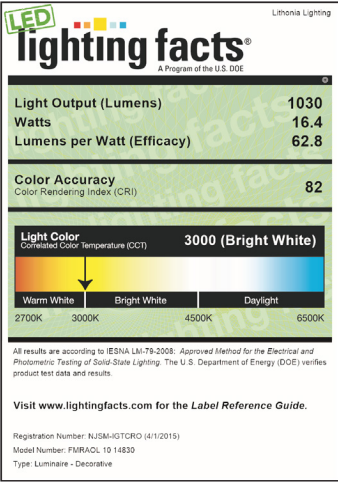

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

SUGGESTED DIMMERS	
The FMRAOL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.	
Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	Skylark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120