

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and commercial applications. Ideal for use as lighting in bathroom/ lavatories, over hospital beds, hallways/corridors stairways and utility areas. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.**

CONSTRUCTION

Minimalist design with maximum style. A sleek cylinder shaped white acrylic diffuser with accenting brushed nickel end caps and matching brushed nickel canopy complements a variety of decors. Diffuser provides a widespread uniform illumination. End caps allow easy access for cleaning and maintenance. Available in 2', 3' and 4' lengths.

Includes (2) Linear T5, 3000K fluorescent lamps for energy efficiency, superior color rendering and long life.

Standard with electronic ballast (120 volt, 60Hz) ensures no flickering and quiet operation without interfering with other home electronics.

For use with non-dimmable switches only.

All mounting hardware included.

LISTINGS

UL listed to US and Canadian safety standards and listed, suitable for damp locations. ADA compliant.

WARRANTY

1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_Conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.


Catalog Number
Notes
Type

Decorative Indoor


CYLV




CYLINDER VANITY

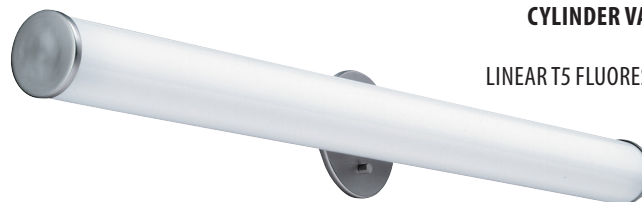LINEAR T5 FLUORESCENT

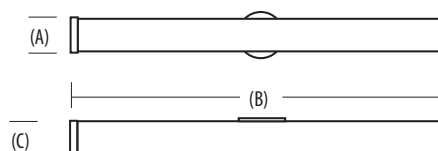

ADA  LISTED



Nominal size	Lamp configuration	Model number	Number of lamps	(A) Width inches (cm)	(B) Height inches (cm)	(C) Extension * inches (cm)
2'		11802RET5	(2) 14W linear T5	2-7/8 (7.3)	23-1/8 (58.7)	3-3/8 (7.6)
3'		11803RET5	(2) 21W linear T5	2-7/8 (7.3)	35-1/4 (89.5)	3-3/8 (7.6)
4'		11804RET5	(2) 28W linear T5	2-7/8 (7.3)	47 (119.4)	3-3/8 (7.6)

* Maximum extension from wall

All dimensions are in inches (centimeters)

ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: 11802RET5 BN

Series ^{1,2}	Finish	Ballast/voltage
Series 11802RET5 2' (2) 14W linear T5 3000K fluorescent lamps included 11803RET5 3' (2) 21W linear T5 3000K fluorescent lamps included 11804RET5 4' (2) 28W linear T5 3000K fluorescent lamps included	BN Brushed nickel	(blank) 2 fitter head 120 volt residential electronic ballast (standard) Other voltage and ballast types (Consult factory)

Replacement Parts: Order as separate catalog number.

DMICY 24	2' matte white acrylic diffuser
DMICY 36	3' matte white acrylic diffuser
DMICY 48	4' matte white acrylic diffuser

Notes

- Includes - (2) linear T5 3000K fluorescent lamps.
- Use with non-dimmable switches only.

CYLV - Cylinder Vanity

PHOTOMETRICS

11803RET5 BN, 1837 delivered lumens, test no. LTL 25728M, tested in accordance to IESNA LM-79.

